

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP. WT.**
					A	B	C	D	E	
P04-05-09-005	A	1/2	4"	1" NPT	29.9	16.4	13.5	3.8	3.9	9
P04-05-13-005	A	1/2	4"	1" NPT	33.3	16.4	16.9	3.8	3.9	12
P04-05-18-007	A	3/4	4"	1" NPT	38.5	17.5	21.0	3.8	3.9	14
P04-05-22-010	A	1	4"	1" NPT	42.9	18.6	24.3	3.8	3.9	16
P04-05-26-015	A	1 1/2	4"	1" NPT	47.8	20.2	27.6	3.8	3.9	18
P04-05-31-015	A	1 1/2	4"	1" NPT	53.7	20.2	33.5	3.8	3.9	21
P04-05-39-020	A	2	4"	1" NPT	62.6	22.5	40.1	3.8	3.9	25
P04-05-48-030	A	3	4"	1" NPT	70.1	22.5	47.6	3.8	3.9	30

NOTES: All models suitable for use in 4" wells, unless otherwise noted.

** Weights shown are in lbs. for pump end only.

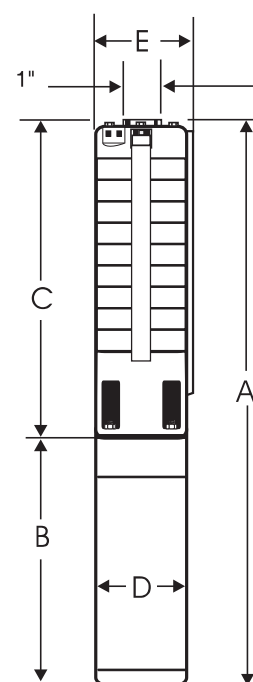


Fig. A

MATERIALS OF CONSTRUCTION

COMPONENT	SPLINED SHAFT (9-26 Stgs.)	SPLINED SHAFT (31-48 Stgs.)
Check Valve Housing	304 Stainless steel	304 Stainless steel
Check Valve	304 Stainless steel	304 Stainless steel
Diffuser Chamber	304 Stainless steel	304 Stainless steel
Impeller	304 Stainless steel	304 Stainless steel
Suction Interconnector	304 Stainless steel	304 Stainless steel
Inlet Screen	304 Stainless steel	304 Stainless steel
Pump Shaft	316 Stainless steel	316 Stainless steel
Straps	304 Stainless steel	304 Stainless steel
Cable Guard	304 Stainless steel	304 Stainless steel
Priming Inducer	304 Stainless steel	304 Stainless steel
Coupling	316 Stainless steel	316 Stainless steel
Check Valve Seat	NBR/304 Stainless steel	NBR/304 Stainless steel
Top Bearing	NBR	NBR
Impeller Seal Ring	NBR/PBT	NBR/PBT
Intermediated Bearings	NBR	NBR

NOTES: Specifications subject to change without notice.