

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP. WT.**
					A	B	C	D	E	
P04-60-04-020	A	2	4"	2" NPT	40.0	22.5	17.5	3.8	3.9	12
P04-60-05-030	A	3	4"	2" NPT	42.6	22.5	20.1	3.8	3.9	14
P04-60-07-050	A	5	4"	2" NPT	53.6	28.4	25.2	3.8	3.9	17
P04-60-09-050	A	5	4"	2" NPT	59.3	28.4	30.9	3.8	3.9	21
P04-60-13-075*	A	7 1/2	4"	2" NPT	71.0	28.0	43.0	3.8	3.9	28
P04-60-18-100*	A	10	4"	2" NPT	87.8	32.0	55.8	3.8	3.9	37

NOTES: All models suitable for use in 4" wells, unless otherwise noted.

* Also available with 6" motor.

** Weights shown are in lbs. for pump end only.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (4-18 Stgs.)
Check Valve Housing	304 Stainless steel
Check Valve	304 Stainless steel
Diffuser Chamber	304 Stainless steel
Impeller	304 Stainless steel
Suction Interconnector	304 Stainless steel
Inlet Screen	304 Stainless steel
Pump Shaft	316 Stainless steel
Straps	304 Stainless steel
Cable Guard	304 Stainless steel
Priming Inducer	304 Stainless steel
Coupling	316 Stainless steel
Check Valve Seat	NBR
Top Bearing	NBR
Impeller Seal Ring	NBR
Intermediated Bearings	NBR
Split Cone	304 Stainless Steel
Split Cone Nut	304 Stainless Steel

NOTES: Specifications subject to change without notice.

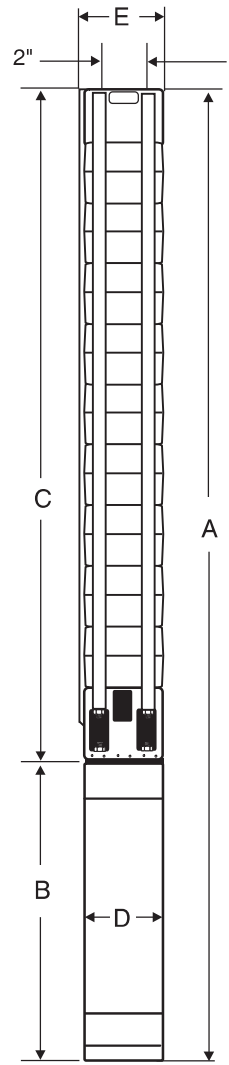


Fig. A