

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP. WT**
					A	B	C	D	E	
P06-150-01-020	A	2	4"	3" NPT	36.2	22.5	13.7	3.7	5.2	19
P06-150-02-050	A	5	4"	3" NPT	45.9	28.4	17.5	3.7	5.2	23
P06-150-03-075	A	7 1/2	4"	3" NPT	49.3	28.0	21.3	3.7	5.2	27
P06-150-04-075	A	7 1/2	4"	3" NPT	53.1	28.0	25.1	3.7	5.2	31
P06-150-05-100	A	10	4"	3" NPT	60.9	32.0	28.9	3.7	5.2	35
P06-150-04-075	A	7 1/2	6"	3" NPT	53.6	27.9	25.7	5.6	5.6	31
P06-150-05-100	A	10	6"	3" NPT	59.3	29.8	29.5	5.6	5.6	35
P06-150-06-150	A	15	6"	3" NPT	67.3	34.0	33.3	5.6	5.6	40
P06-150-07-150	A	15	6"	3" NPT	71.0	34.0	37.0	5.6	5.6	44
P06-150-08-150	A	15	6"	3" NPT	74.8	34.0	40.8	5.6	5.6	49
P06-150-09-200	A	20	6"	3" NPT	82.5	37.9	44.6	5.6	5.6	53
P06-150-10-200	A	20	6"	3" NPT	86.3	37.9	48.4	5.6	5.6	57
P06-150-11-200	A	20	6"	3" NPT	90.1	37.9	52.2	5.6	5.6	61
P06-150-12-250	A	25	6"	3" NPT	96.2	40.3	55.9	5.6	5.6	65
P06-150-13-250	A	25	6"	3" NPT	100.0	40.3	59.7	5.6	5.6	70
P06-150-14-250	A	25	6"	3" NPT	103.8	40.3	63.5	5.6	5.6	74
P06-150-15-300	A	30	6"	3" NPT	109.9	42.6	67.3	5.6	5.6	78
P06-150-16-300	A	30	6"	3" NPT	113.7	42.6	71.1	5.6	5.6	82
P06-150-17-300	A	30	6"	3" NPT	117.4	42.6	74.8	5.6	5.6	86
P06-150-18-400	A	40	6"	3" NPT	126.4	47.8	78.6	5.6	5.6	92
P06-150-19-400	A	40	6"	3" NPT	130.2	47.8	82.4	5.6	5.6	96
P06-150-20-400	A	40	6"	3" NPT	134.0	47.8	86.2	5.6	5.6	100
P06-150-21-400	A	40	6"	3" NPT	137.8	47.8	90.0	5.6	5.6	104
P06-150-22-400	A	40	6"	3" NPT	141.5	47.8	93.7	5.6	5.6	108
P06-150-23-400	A	40	6"	3" NPT	145.3	47.8	97.5	5.6	5.6	113
P06-150-24-500	A	50	6"	3" NPT	156.1	51.7	104.4	5.6	6.9	117
P06-150-25-500	A	50	6"	3" NPT	159.9	51.7	108.2	5.6	6.9	121
P06-150-26-500	A	50	6"	3" NPT	163.7	51.7	112.0	5.6	6.9	125
P06-150-27-500	A	50	6"	3" NPT	167.5	51.7	115.8	5.6	6.9	129
P06-150-28-500	A	50	6"	3" NPT	171.3	51.7	119.6	5.6	6.9	133
P06-150-29-600*	A	60	6"	3" NPT	185.5	55.6	129.9	5.6	7.5	300
P06-150-31-600*	A	60	6"	3" NPT	193.1	55.6	137.5	5.6	7.5	321
P06-150-33-600*	A	60	6"	3" NPT	200.6	55.6	145.0	5.6	7.5	341
P06-150-24-500-8	A	50	8"	3" NPT	153.3	48.9	104.4	7.5	7.5	189
P06-150-25-500-8	A	50	8"	3" NPT	157.1	48.9	108.2	7.5	7.5	201
P06-150-26-500-8	A	50	8"	3" NPT	160.9	48.9	112.0	7.5	7.5	212
P06-150-27-500-8	A	50	8"	3" NPT	164.7	48.9	115.8	7.5	7.5	224
P06-150-28-500-8	A	50	8"	3" NPT	168.5	48.9	119.6	7.5	7.5	235
P06-150-29-600-8*	B	60	8"	3" NPT	180.8	52.9	127.9	7.5	7.5	308
P06-150-31-600-8*	B	60	8"	3" NPT	188.4	52.9	135.5	7.5	7.5	321
P06-150-33-600-8*	B	60	8"	3" NPT	195.9	52.9	143.0	7.5	7.5	341
P06-150-36-750-8*	B	75	8"	3" NPT	209.2	54.8	154.4	7.5	7.5	366
P06-150-39-750-8*	B	75	8"	3" NPT	220.5	54.8	165.7	7.5	7.5	391

NOTES: All models suitable for use in 6" wells, unless otherwise noted.

* Built into sleeve 3" NPT discharge, 8" min. well dia.

** Weights shown are in lbs. for pump end only.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (1-39 Stgs.)
Check Valve Housing	304 Stainless steel
Check Valve	304 Stainless steel
Diffuser Chamber	304 Stainless steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless steel
Suction Interconnector	304 Stainless steel
Inlet Screen	304 Stainless Steel
Seal Ring Support Plate	304 Stainless steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Priming Inducer	304 Stainless Steel
Coupling	316 Stainless steel
Pump Shaft	431 Stainless steel
Intermediated Bearings	NBR
Impeller Seal Ring	NBR
Check Valve Seat	NBR/304 Stainless Steel
Top Bearing	NBR/304 Stainless Steel
Upthrust Disc	Carbon/Graphite
Upthrust Stop Washer	304 Stainless Steel
8" Motor Adaptor Plate	304 Stainless Steel
Sleeve*	304 Stainless Steel
Sleeve Flange*	304 Stainless Steel

NOTES: Specifications subject to change without notice.

* Required for 29-39 stages.

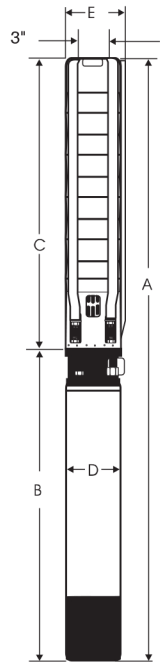


Fig. A

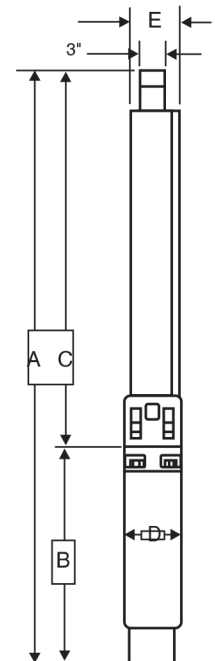


Fig. B