

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP. WT**.
					A	B	C	D	E	
P06-230-01B-020	A	2	4"	3" NPT	37.1	22.5	14.6	3.7	5.7	20
P06-230-01A-030	A	3	4"	3" NPT	37.1	22.5	14.6	3.7	5.7	20
P06-230-01-050	A	5	4"	3" NPT	43.0	28.4	14.6	3.7	5.7	20
P06-230-02AB-050	A	5	4"	3" NPT	47.3	28.4	18.9	3.7	5.7	25
P06-230-02-075	A	7 1/2	4"	3" NPT	46.9	28.0	18.9	3.7	5.7	25
P06-230-02-075-6	A	7 1/2	6"	3" NPT	46.8	27.9	18.9	5.6	5.8	25
P06-230-03BB-075	A	7 1/2	4"	3" NPT	51.9	28.0	23.9	3.7	5.7	30
P06-230-03BB-075-6	A	7 1/2	6"	3" NPT	51.8	27.9	23.9	5.6	5.8	30
P06-230-03-100	A	10	4"	3" NPT	55.9	32.0	23.9	3.7	5.7	30
P06-230-03-100-6	A	10	6"	3" NPT	53.7	29.8	23.9	5.6	5.8	30
P06-230-04BC-100	A	10	4"	3" NPT	60.4	32.0	28.4	3.7	5.7	35
P06-230-04BC-100-6	A	10	6"	3" NPT	58.2	29.8	28.4	5.6	5.8	35
P06-230-04-150	A	15	6"	3" NPT	62.4	34.0	28.4	5.6	5.8	35
P06-230-05B-150	A	15	6"	3" NPT	66.8	34.0	32.8	5.6	5.8	41
P06-230-05-200	A	20	6"	3" NPT	70.7	37.9	32.8	5.6	5.8	41
P06-230-06-200	A	20	6"	3" NPT	75.2	37.9	37.3	5.6	5.8	47
P06-230-07C-200	A	20	6"	3" NPT	75.2	37.9	37.3	5.6	5.8	53
P06-230-07-250	A	25	6"	3" NPT	82.0	40.3	41.7	5.6	5.8	53
P06-230-08B-250	A	25	6"	3" NPT	86.5	40.3	46.2	5.6	5.8	58
P06-230-08-250	A	25	6"	3" NPT	86.5	40.3	46.2	5.6	5.8	58
P06-230-09BB-250	A	25	6"	3" NPT	90.9	40.3	50.6	5.6	5.8	64
P06-230-09-300	A	30	6"	3" NPT	93.2	42.6	50.6	5.6	5.8	64
P06-230-10-400*	A	40	6"	3" NPT	102.9	47.8	55.1	5.6	5.8	69
P06-230-11-400*	A	40	6"	3" NPT	107.3	47.8	59.5	5.6	5.8	74
P06-230-12-400*	A	40	6"	3" NPT	111.8	47.8	64.0	5.6	5.8	81
P06-230-13-400*	A	40	6"	3" NPT	116.2	47.8	68.4	5.6	5.8	86
P06-230-14-500*	A	50	6"	3" NPT	124.6	51.7	72.9	5.6	5.8	91
P06-230-15-500*	A	50	6"	3" NPT	129.0	51.7	77.3	5.6	5.8	98
P06-230-16-500*	A	50	6"	3" NPT	133.5	51.7	81.8	5.6	5.8	103
P06-230-17-600*	A	60	6"	3" NPT	143.0	55.6	87.4	5.6	5.8	108
P06-230-18-600*	A	60	6"	3" NPT	147.4	55.6	91.8	5.6	5.8	114
P06-230-19-600*	A	60	6"	3" NPT	151.9	55.6	96.3	5.6	5.8	119
P06-230-17-600-8	A	60	8"	3" NPT	140.3	52.9	87.4	7.5	7.5	174
P06-230-18-600-8	A	60	8"	3" NPT	144.7	52.9	91.8	7.5	7.5	183
P06-230-19-600-8	A	60	8"	3" NPT	149.2	52.9	96.3	7.5	7.5	191
P06-230-20-750***	B	75	8"	3" M-NPT	162.1	54.8	107.3	7.5	7.5	274
P06-230-22-750***	B	75	8"	3" M-NPT	171.0	54.8	116.2	7.5	7.5	305

NOTES: All models suitable for use in 6" wells, unless equipped with 8" motor.

* Alternate motor sizes available.

** Weights shown are in lbs. for pump end only.

*** Built into sleeve, 3" NPT, 8" motor required.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (2-18 Stgs.)
Check Valve Housing	304 Stainless steel
Check Valve	304 Stainless steel
Diffuser Chamber	304 Stainless steel
Split Cone Nut	304 Stainless Steel
Split Cone	304 Stainless Steel
Impeller	304 Stainless steel
Suction Interconnector	304 Stainless steel
Seal Ring Support	304 Stainless Steel
Inlet Screen	304 Stainless steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	316 Stainless Steel
Pump Shaft	431 Stainless steel
Intermediated Bearings	NBR
Impeller Seal Ring	NBR/304 Stainless Steel
Check Valve Seat	NBR/304 Stainless Steel
Top/Lower Bearing	NBR/304 Stainless Steel
8" Motor Adaptor Plate	304 Stainless Steel
Upthrust Washer	Carbon/Graphite
Upthrust Stop Ring	304 Stainless Steel
Sleeve*	304 Stainless Steel
Sleeve Flange*	304 Stainless Steel

NOTES: Specifications subject to change without notice.

* Required for 20-22 stages only.

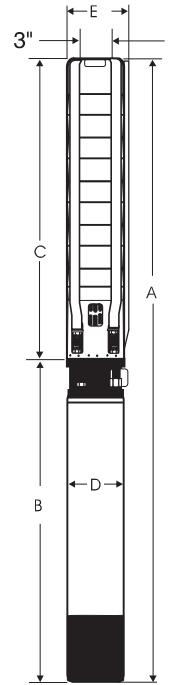


Fig. A

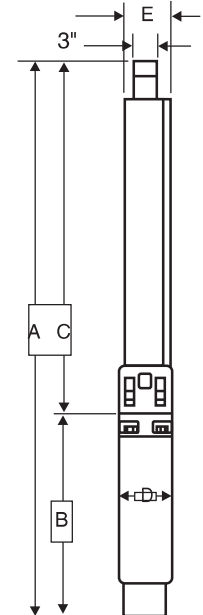


Fig. B