

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX. SHIP. WT**.
					A	B	C	D	E	
P06-085-01-015	A	1 1/2	4"	3" NPT	32.5	20.2	12.3	3.7	5.6	18
P06-085-02-030	A	3	4"	3" NPT	36.9	22.5	14.4	3.7	5.6	21
P06-085-03-050	A	5	4"	3" NPT	45.0	28.4	16.6	3.7	5.6	24
P06-085-04-050	A	5	4"	3" NPT	47.2	28.4	18.8	3.7	5.6	26
P06-085-05-075	A	7 1/2	4"	3" NPT	48.9	28.0	20.9	3.7	5.6	29
P06-085-06-075	A	7 1/2	4"	3" NPT	51.1	28.0	23.1	3.7	5.6	32
P06-085-07-100	A	10	4"	3" NPT	57.3	32.0	25.3	3.7	5.6	35
P06-085-08-100	A	10	4"	3" NPT	59.4	32.0	27.4	3.7	5.6	38
P06-085-09-100	A	10	4"	3" NPT	61.6	32.0	29.6	3.7	5.6	41
P06-085-05-075	A	7 1/2	6"	3" NPT	49.4	27.9	21.6	5.6	5.6	29
P06-085-06-075	A	7 1/2	6"	3" NPT	51.6	27.9	23.7	5.6	5.6	32
P06-085-07-100	A	10	6"	3" NPT	55.7	29.8	25.9	5.6	5.6	35
P06-085-08-100	A	10	6"	3" NPT	57.9	29.8	28.1	5.6	5.6	38
P06-085-09-100	A	10	6"	3" NPT	60.1	29.8	30.2	5.6	5.6	41
P06-085-10-150	A	15	6"	3" NPT	65.2	32.8	32.4	5.6	5.6	44
P06-085-11-150	A	15	6"	3" NPT	67.4	32.8	34.6	5.6	5.6	47
P06-085-12-150	A	15	6"	3" NPT	69.5	32.8	36.7	5.6	5.6	51
P06-085-13-150	A	15	6"	3" NPT	71.7	32.8	38.9	5.6	5.6	54
P06-085-14-200	A	20	6"	3" NPT	77.8	36.7	41.1	5.6	5.6	57
P06-085-15-200	A	20	6"	3" NPT	80.0	36.7	43.2	5.6	5.6	60
P06-085-16-200	A	20	6"	3" NPT	82.1	36.7	45.4	5.6	5.6	63
P06-085-17-200	A	20	6"	3" NPT	84.3	36.7	47.6	5.6	5.6	65
P06-085-18-200	A	20	6"	3" NPT	86.5	36.7	49.7	5.6	5.6	68
P06-085-19-250	A	25	6"	3" NPT	91.0	39.1	51.9	5.6	5.6	71
P06-085-20-250	A	25	6"	3" NPT	93.1	39.1	54.1	5.6	5.6	74
P06-085-21-250	A	25	6"	3" NPT	95.3	39.1	56.2	5.6	5.6	78
P06-085-22-250	A	25	6"	3" NPT	97.5	39.1	58.4	5.6	5.6	81
P06-085-23-300	A	30	6"	3" NPT	102.0	41.5	60.6	5.6	5.6	84
P06-085-24-300	A	30	6"	3" NPT	104.2	41.5	62.7	5.6	5.6	87
P06-085-25-300	A	30	6"	3" NPT	106.3	41.5	64.9	5.6	5.6	90
P06-085-26-300	A	30	6"	3" NPT	108.5	41.5	67.0	5.6	5.6	92
P06-085-27-300	A	30	6"	3" NPT	110.7	41.5	69.2	5.6	5.6	95
P06-085-28-400	A	40	6"	3" NPT	118.0	46.6	71.4	5.6	5.6	99
P06-085-29-400	A	40	6"	3" NPT	120.1	46.6	73.5	5.6	5.6	102
P06-085-30-400	A	40	6"	3" NPT	122.3	46.6	75.7	5.6	5.6	105
P06-085-33-400*	B	40	6"	3" NPT	128.8	46.6	82.2	5.6	6.9	244
P06-085-36-400*	B	40	6"	3" NPT	135.3	46.6	88.7	5.6	6.9	280
P06-085-39-500*	B	50	6"	3" NPT	146.9	51.7	95.2	5.6	6.9	286
P06-085-33-400-8*	B	40	8"	3" NPT	140.5	45.4	95.1	7.5	6.9	248
P06-085-36-400-8*	B	40	8"	3" NPT	147.0	45.4	101.6	7.5	6.9	285
P06-085-39-500-8*	B	50	8"	3" NPT	157.0	48.9	108.1	7.5	6.9	290

NOTES: All models suitable for use in 6" wells, unless otherwise noted.

* Built into sleeve 3" NPT discharge, 8" min. well dia.

** Weights shown are in lbs. for pump end only.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (1-39 Stgs.)
Check Valve Housing	304 Stainless steel
Check Valve	304 Stainless steel
Diffuser Chamber	304 Stainless steel
Split Cone Nut	304 Stainless steel
Split Cone	304 Stainless steel
Impeller	304 Stainless steel
Suction Interconnector	304 Stainless steel
Seal Ring Support	304 Stainless Steel
Inlet Screen	304 Stainless steel
Straps	304 Stainless Steel
Cable Guard	304 Stainless Steel
Coupling	316 Stainless Steel
Pump Shaft	431 Stainless steel
Intermediated Bearings	NBR
Impeller Seal Ring	NBR
Check Valve Seat	NBR/304 Stainless Steel
Upthrust Disc	NBR
Upthrust Stop Washer	304 Stainless Steel
Sleeve*	304 Stainless Steel
Sleeve Flange*	304 Stainless Steel

NOTES: Specifications subject to change without notice.

* Required for 33-39 stages.

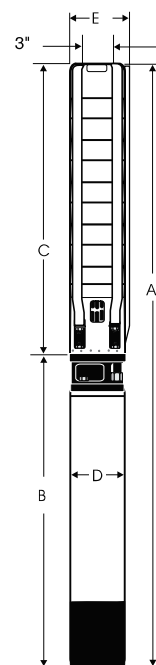


Fig. A

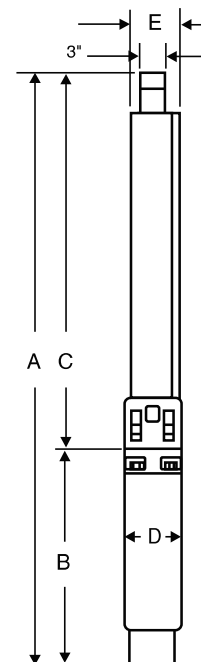


Fig. B