


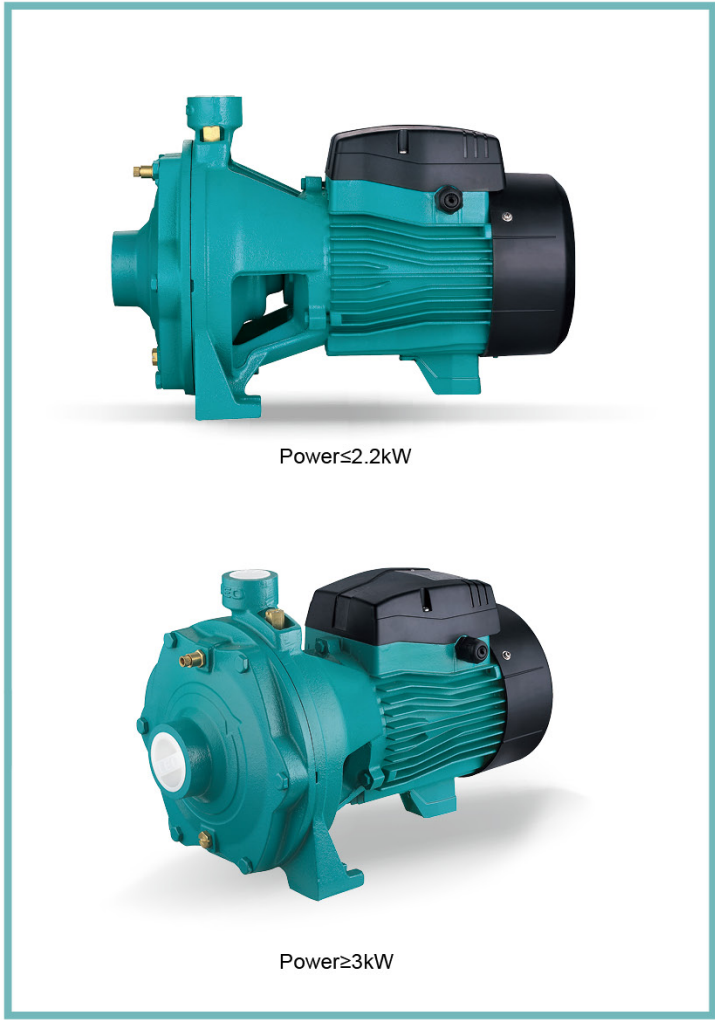

Application

- Can be used to transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable for industrial use and urban water supply, pressure boosting for high buildings and fire fighting, garden irrigation, long-distance water transfer, heating ventilation and air conditioning, circulation and pressure boosting for cold and hot water, and supporting equipment etc.


Pump

- Cast iron pump body and support under special anti-rust treatment
- AISI 304 shaft
- Max. liquid temperature: +60°C
- Max.suction: + 8 m

Motor


- Low noise&Long life bearing
- Built-in thermal protector for single phase motor
- Insulation class: F
- Protection class: IPX4
- Max. ambient temperature: +40°C
- IE 2 motor (Three phase, power ≥ 0.75kW)

Identification Codes

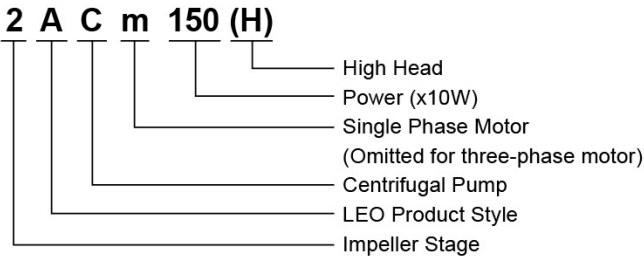

Technical Data


Model		Power		Q(m³/h)	0	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6	6.6	7.2	8.4	9.6	10.8	12	15	
Single Phase	Three Phase	kW	HP	Q(l/min)	0	20	30	40	50	60	70	80	90	100	110	120	140	160	180	220	250	
2ACm75	2AC75	0.75	1	H (m)	45	42.5	40	37	33.5	28.5	23	15	-	-	-	-	-	-	-	-	-	
2ACm110	2AC110	1.1	1.5		47	46	45	44	43	41.5	40	38	35.5	33	30.5	28	22	-	-	-	-	-
2ACm150	2AC150	1.5	2		57.5	55.5	54.5	53.5	52	50.5	49	47	44.5	41.5	38.5	35	28	20	-	-	-	-
2ACm150H	2AC150H	1.5	2		63.5	60.5	58.5	56.5	54	51.5	48.5	45	41	37.5	33.5	29	-	-	-	-	-	-
-	2AC220	2.2	3		65	63	62	61	59.5	58	56	54	51.5	49	46	43	36	28.5	20.5	-	-	-
2ACm300H	-	3	4		65	-	-	62	61	60	59	58	56.5	55	53.5	52.5	48.5	44.5	40	35	21	-
-	2AC300H	3	4		70	-	-	67	66	65	64	63	62	61	59.5	59	55.5	52	49	45	33	-
-	2AC400H	4	5.5		82	-	-	79.5	78.5	77.5	76.5	75.5	74.5	73.5	72	71	67.5	64.5	61	57	45.5	-

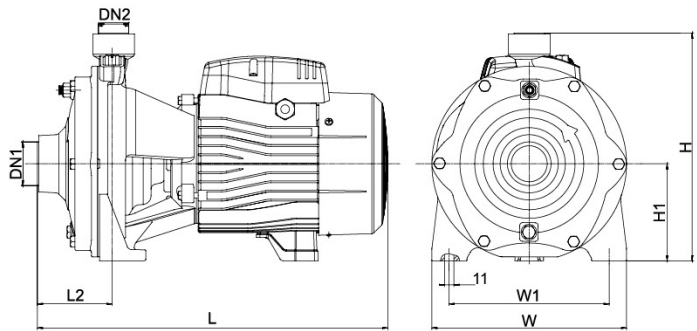

Dimension


Model	DN1	DN2	L (mm)	L1 (mm)	H (mm)	H1 (mm)	W (mm)	W1 (mm)
2AC(m)75	1 1/4"	1"	336	72	231	100	181	145
2AC(m)110	1 1/2"		379	71	225	93	200	162
2AC(m)150	1 1/2"	1 1/4"	400	80	262	112	225	185
2AC(m)150H	1 1/2"		480	63	311	132	281	234
2AC220	1 1/2"	1 1/4"	480	63	311	132	281	234
2ACm300H	1 1/2"		480	63	311	132	281	234
2AC300H	1 1/2"	1 1/4"	480	63	311	132	281	234
2AC400H	1 1/2"		480	63	311	132	281	234

Hydraulic Performance Curves

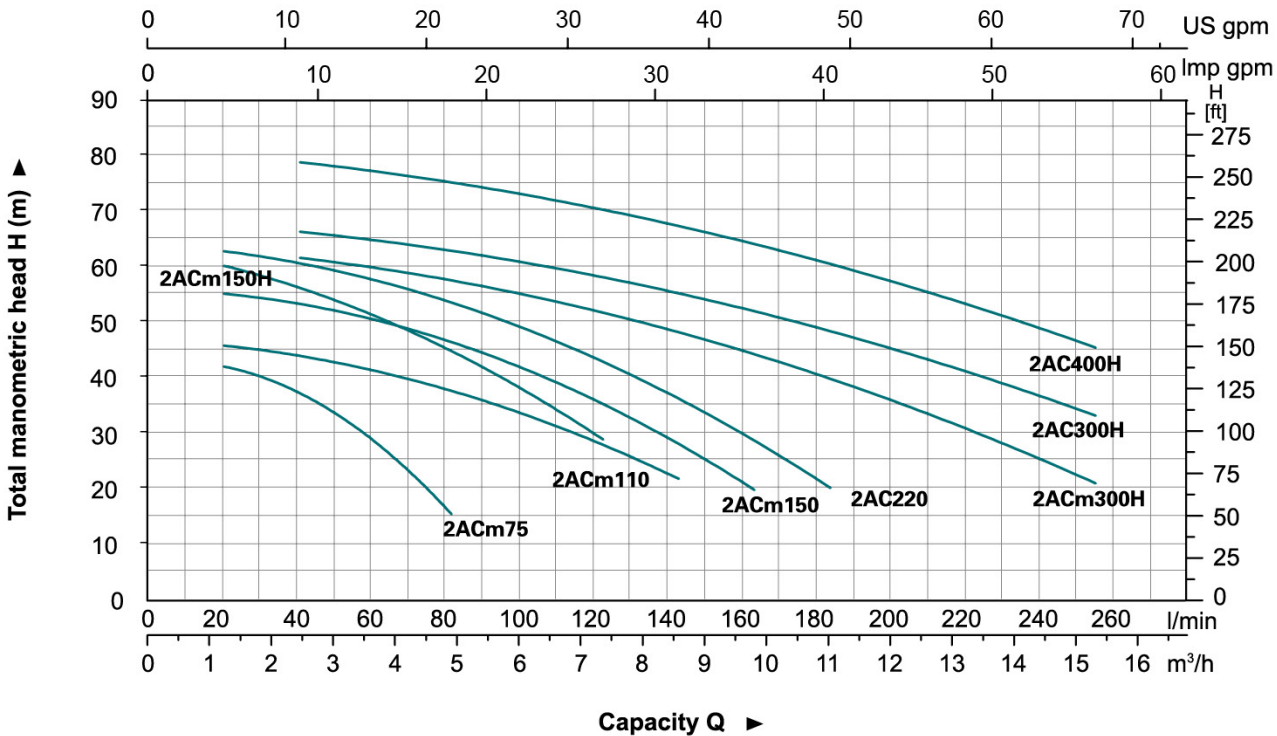

Materials Table

No.	Part	Material	No.	Part	Material
1	Drain plug	HPb59-1	11	Stator	
2	Pump body	HT200	12	Rear cover	ZL102
3	Gasket	NBR	13	Fan	PP
4	Impeller	AISI 304/Brass HT200	14	Fan cover	PP
5	Bracket cover	HT200	15	Terminal board	PC
6	Mechanical seal	Carbon/Ceramic	16	Capacitor	
7	Support	HT200	17	Terminal box	PA6-GF25
8	Oil seal				
9	Bearing				
10	Rotor				

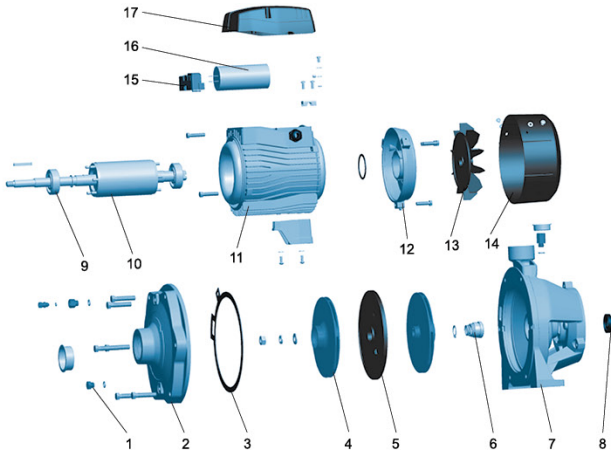

Package Information

Model	GW (Kgs)	L (mm)	W (mm)	H (mm)	Quantity (PCS/20"TEU)
2AC(m)75	16.8	385	215	270	1190
2AC(m)110	21	430	235	275	833
2AC(m)150	27.5	445	255	300	636
2AC(m)150H	27.8	440	254	299	636
2AC220	27.5	445	255	300	629
2ACm300H	51.9	542	330	346	337
2AC300H	51.5	542	330	346	340
2AC400H	52.4	542	330	346	346

