



4XR 7

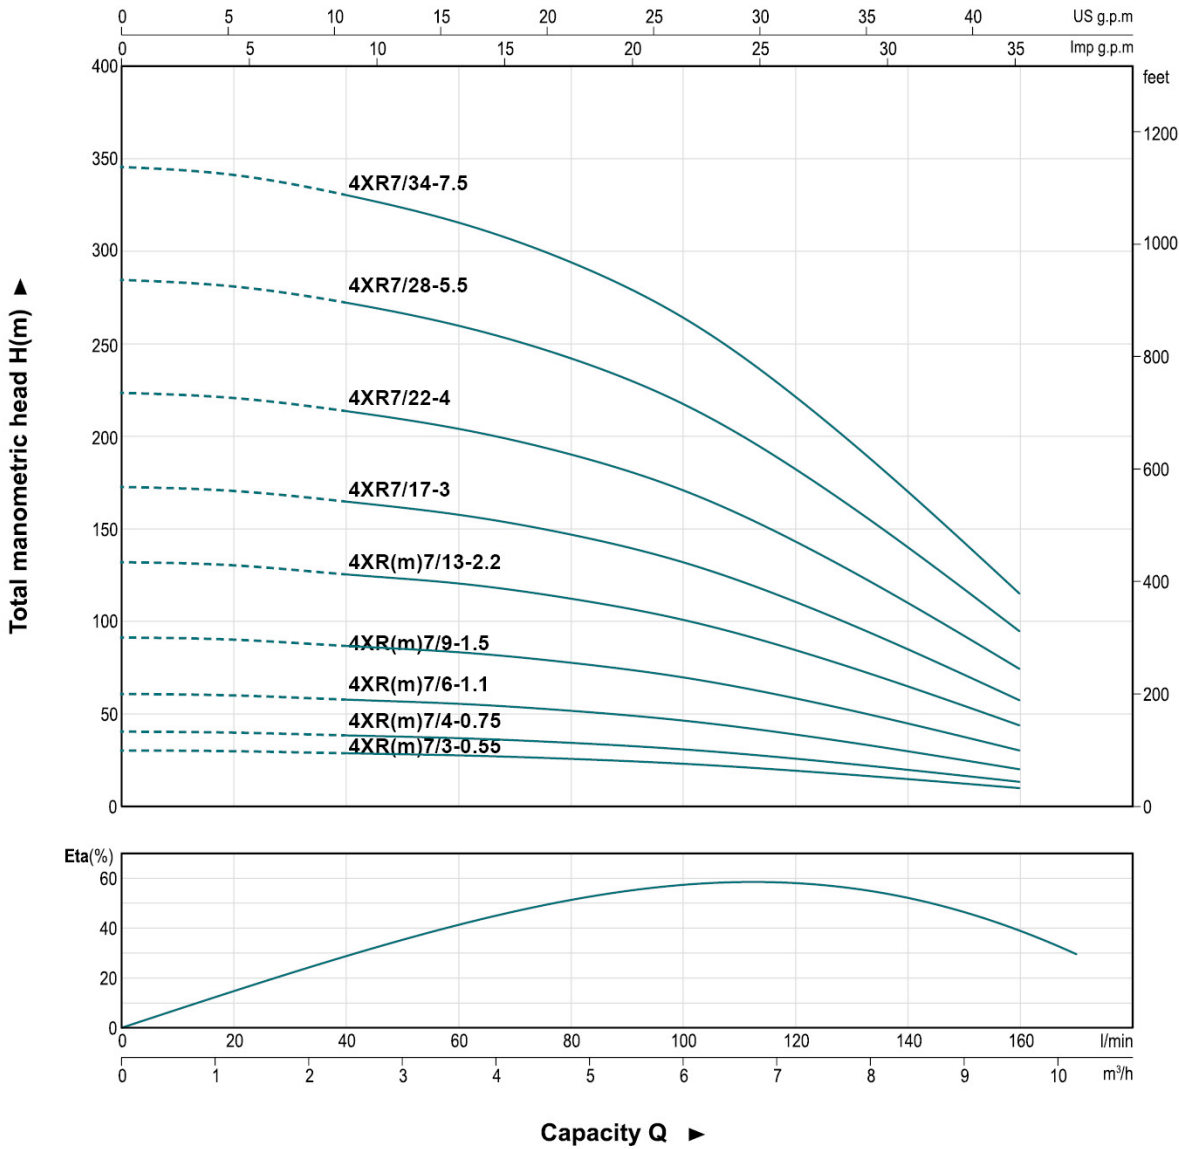

Technical Data

Model		Power		DELIVERY n≈3450 rpm									
1~ 110 - 220V	3~ 220 - 380V	kW	HP	Q(m³/h)	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6
				Q(l/min)	0	20	40	60	80	100	120	140	160
4XRm7/3-0.55	4XR7/3-0.55	0.55	0.75	H (m)	30	30	29	28	26	23	20	15	10
4XRm7/4-0.75	4XR7/4-0.75	0.75	1		41	40	39	37	35	31	26	20	14
4XRm7/6-1.1	4XR7/6-1.1	1.1	1.5		61	60	58	56	52	47	39	30	20
4XRm7/9-1.5	4XR7/9-1.5	1.5	2		91	90	87	83	78	70	59	45	30
4XRm7/13-2.2	4XR7/13-2.2	2.2	3		132	130	125	120	112	101	85	65	44
-	4XR7/17-3	3	4		172	170	164	157	147	132	111	85	57
-	4XR7/22-4	4	5.5		223	220	212	204	190	171	143	110	74
-	4XR7/28-5.5	5.5	7.5		284	280	270	259	242	217	182	140	95
-	4XR7/34-7.5	7.5	10		344	340	327	315	293	264	221	170	115

4XR 9

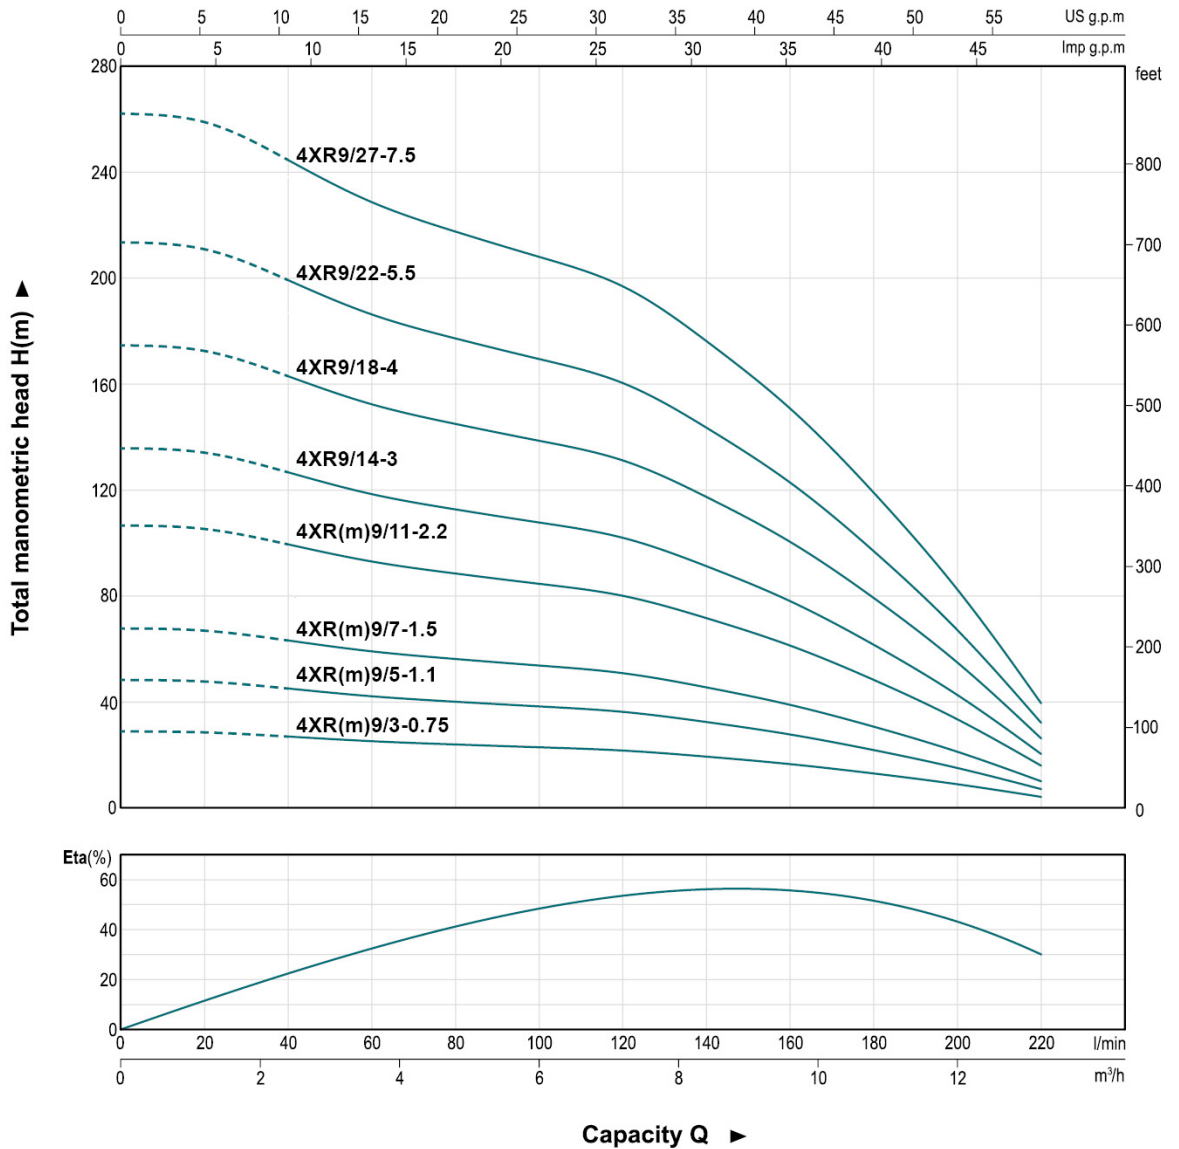


Technical Data

Model		Power		DELIVERY n≈3450 rpm													
1~ 110 - 220V	3~ 220 - 380V	kW	HP	Q(m³/h)	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8	12	13.2	
				Q(l/min)	0	20	40	60	80	100	120	140	160	180	200	220	
4XRm9/3-0.75	4XR9/3-0.75	0.75	1	H (m)	29	29	27	25	24	23	22	20	17	13	9	4	
4XRm9/5-1.1	4XR9/5-1.1	1.1	1.5		49	48	45	42	40	39	36	33	28	22	15	7	
4XRm9/7-1.5	4XR9/7-1.5	1.5	2		68	67	64	59	57	54	51	46	39	31	22	10	
4XRm9/11-2.2	4XR9/11-2.2	2.2	3		107	106	100	93	89	85	80	72	62	48	34	16	
-	4XR9/14-3	3	4		136	134	127	119	113	108	102	91	78	62	43	21	
-	4XR9/18-4	4	5.5		175	173	163	153	145	139	131	117	101	79	55	27	
-	4XR9/22-5.5	5.5	7.5		213	211	200	187	178	169	161	143	123	97	68	33	
-	4XR9/27-7.5	7.5	10		262	259	245	229	218	208	197	176	151	119	83	40	

4XR 18

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(r)	T(s)	T(r)	P	M(s)	M(r)	T(s)	T(r)
4XRm18/3-1.5	4XR18/3-1.5	2"	1¼"/1½"	428	451	426	879	854	4.2	12.9	11.7	17.1	15.9
4XRm18/5-2.2	4XR18/5-2.2	2"	1¼"/1½"	565	532	492	1097	1057	5.1	17.7	15.7	22.8	20.8
-	4XR18/7-3	2"	1¼"/1½"	733	-	598	-	1331	6.0	-	19.8	-	25.8
-	4XR18/9-4	2"	1¼"/1½"	870	-	673	-	1543	6.9	-	23.7	-	30.6
-	4XR18/12-5.5	2"	1¼"/1½"	1076	-	776	-	1852	8.2	-	28.0	-	36.2
-	4XR18/14-7.5	2"	1¼"/1½"	1212	-	896	-	2108	9.1	-	34.0	-	43.1


* S = Single phase * T = Three phase



4XRS 2

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(τ)	T(s)	T(τ)	P	M(s)	M(τ)	T(s)	T(τ)
4XRSm2/6-0.37	4XRS2/6-0.37	1¼"	1"/1½"	275	314	314	589	589	2.0	6.6	6.6	8.6	8.6
4XRSm2/8-0.55	4XRS2/8-0.55	1¼"	1"/1½"	317	329	329	646	646	2.4	7.2	7.3	9.7	9.7
4XRSm2/11-0.75	4XRS2/11-0.75	1¼"	1"/1½"	380	359	344	739	724	3.1	8.7	8.0	11.8	11.1
4XRSm2/16-1.1	4XRS2/16-1.1	1¼"	1"/1½"	485	399	379	884	864	4.2	10.6	9.8	14.8	14.0
4XRSm2/22-1.5	4XRS2/22-1.5	1¼"	1"/1½"	611	449	414	1060	1025	5.5	12.9	11.2	18.4	16.7
4XRSm2/28-2.2	4XRS2/28-2.2	1¼"	1"/1½"	737	542	502	1279	1239	6.8	17.8	15.6	24.6	22.4
-	4XRS2/36-3	1¼"	1"/1½"	905	-	552	-	1457	8.6	-	18.2	-	26.8

* S = Single phase * T = Three phase



4XRS 3

Model		DN		Dimension(mm)					Weight(kg)				
1~ 110 - 220V	3~ 220 - 380V	Standard	Optional	P	M(s)	M(r)	T(s)	T(r)	P	M(s)	M(r)	T(s)	T(r)
4XRSm3/4-0.37	4XRS3/4-0.37	1¼"	1"/1½"	233	314	314	547	547	1.7	6.6	6.6	8.3	8.3
4XRSm3/5-0.55	4XRS3/5-0.55	1¼"	1"/1½"	254	329	329	583	583	1.9	7.3	7.3	9.2	9.2
4XRSm3/7-0.75	4XRS3/7-0.75	1¼"	1"/1½"	296	359	344	655	640	2.4	8.7	8.0	11.1	10.4
4XRSm3/11-1.1	4XRS3/11-1.1	1¼"	1"/1½"	380	399	379	779	759	3.2	10.6	9.8	13.8	13.0
4XRSm3/15-1.5	4XRS3/15-1.5	1¼"	1"/1½"	464	449	414	913	878	4.1	12.9	11.2	17.0	15.3
4XRSm3/21-2.2	4XRS3/21-2.2	1¼"	1"/1½"	590	542	502	1132	1092	5.4	17.8	15.6	23.2	21.0
-	4XRS3/28-3	1¼"	1"/1½"	737	-	552	-	1289	7.0	-	18.2	-	25.2
-	4XRS3/36-4	1¼"	1"/1½"	905	-	622	-	1527	8.7	-	21.4	-	30.1
-	4XRS3/44-5.5	1¼"	1"/1½"	1073	-	718	-	1791	10.5	-	25.5	-	36.0

* S = Single phase * T = Three phase

