


FLOW RANGE: 45 - 95 GPM

OUTLET SIZE: 2" NPT

NOMINAL DIA. 4"

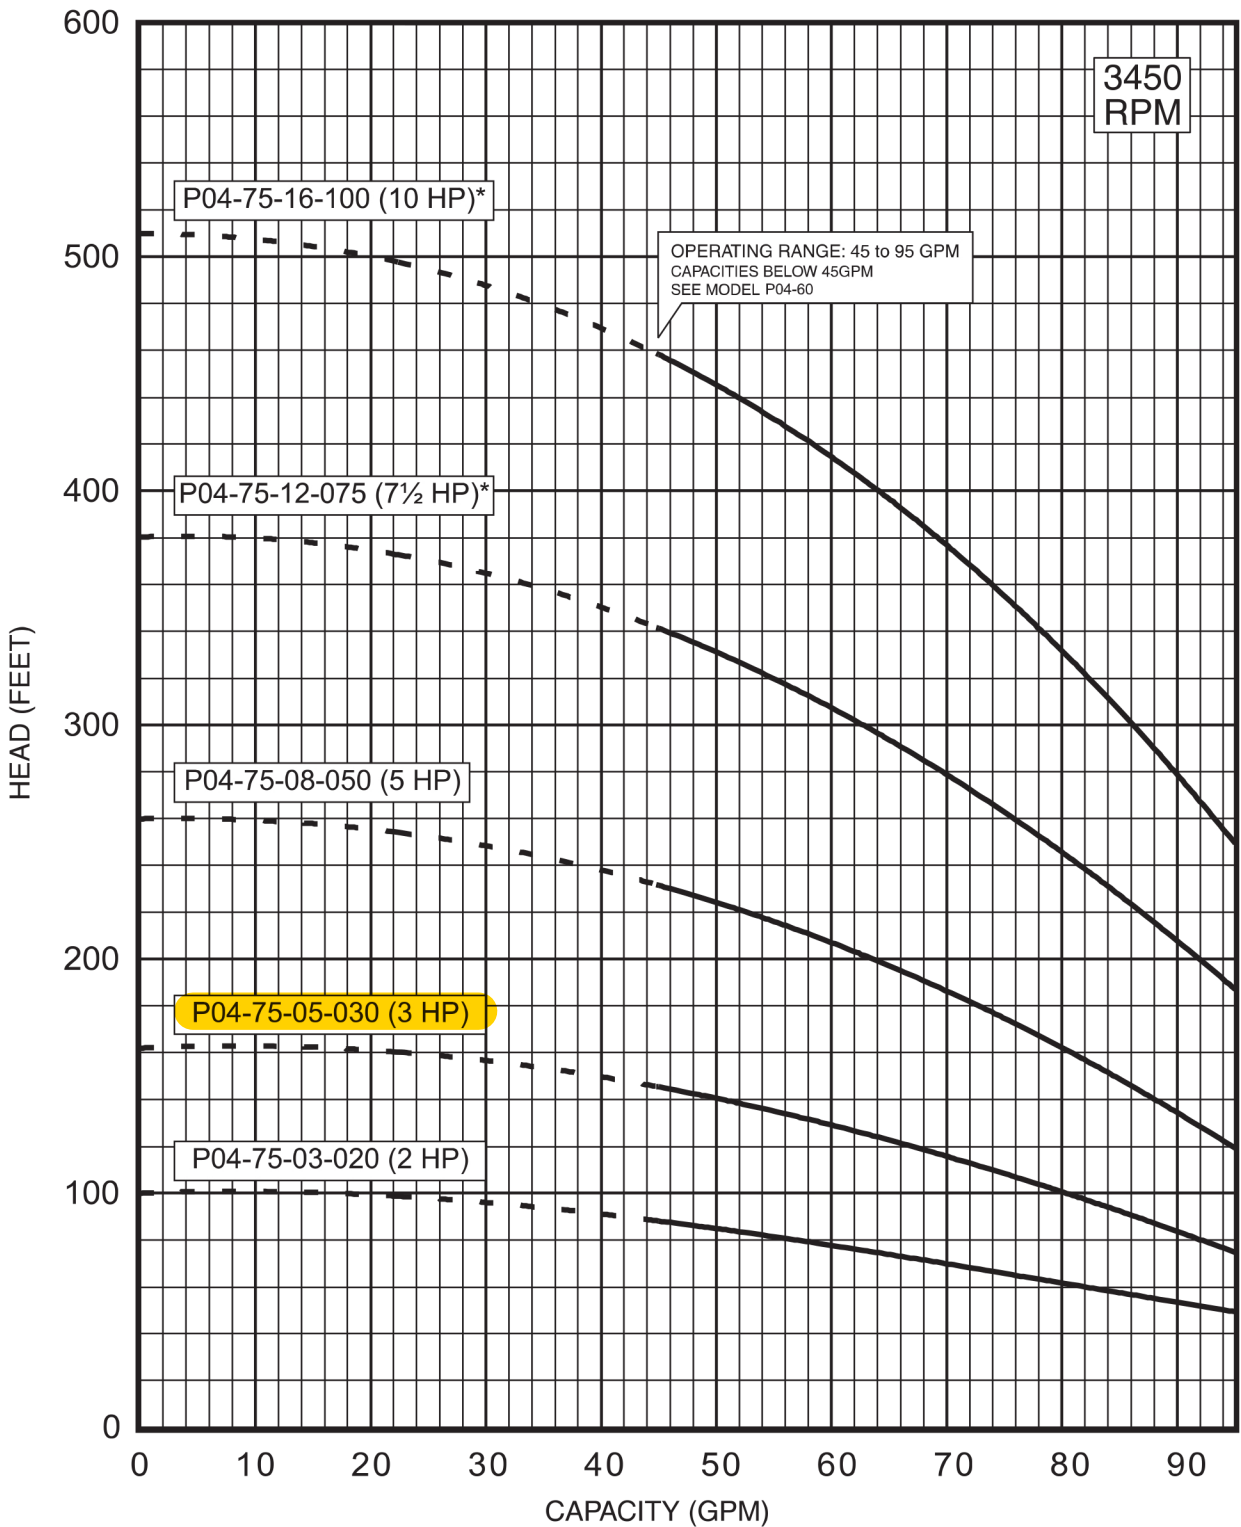

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
4" MOTOR STANDARD, 2-10 HP/3450 RPM.

\* Also available with 6" motor, performance is the same only at Best Efficiency Point.  
Consult factory for actual performance.

Performance conforms to ISO 9906, 1999 (E) Annex A  
@ 5 ft. min. submergence.