


FLOW RANGE: 18 - 118 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

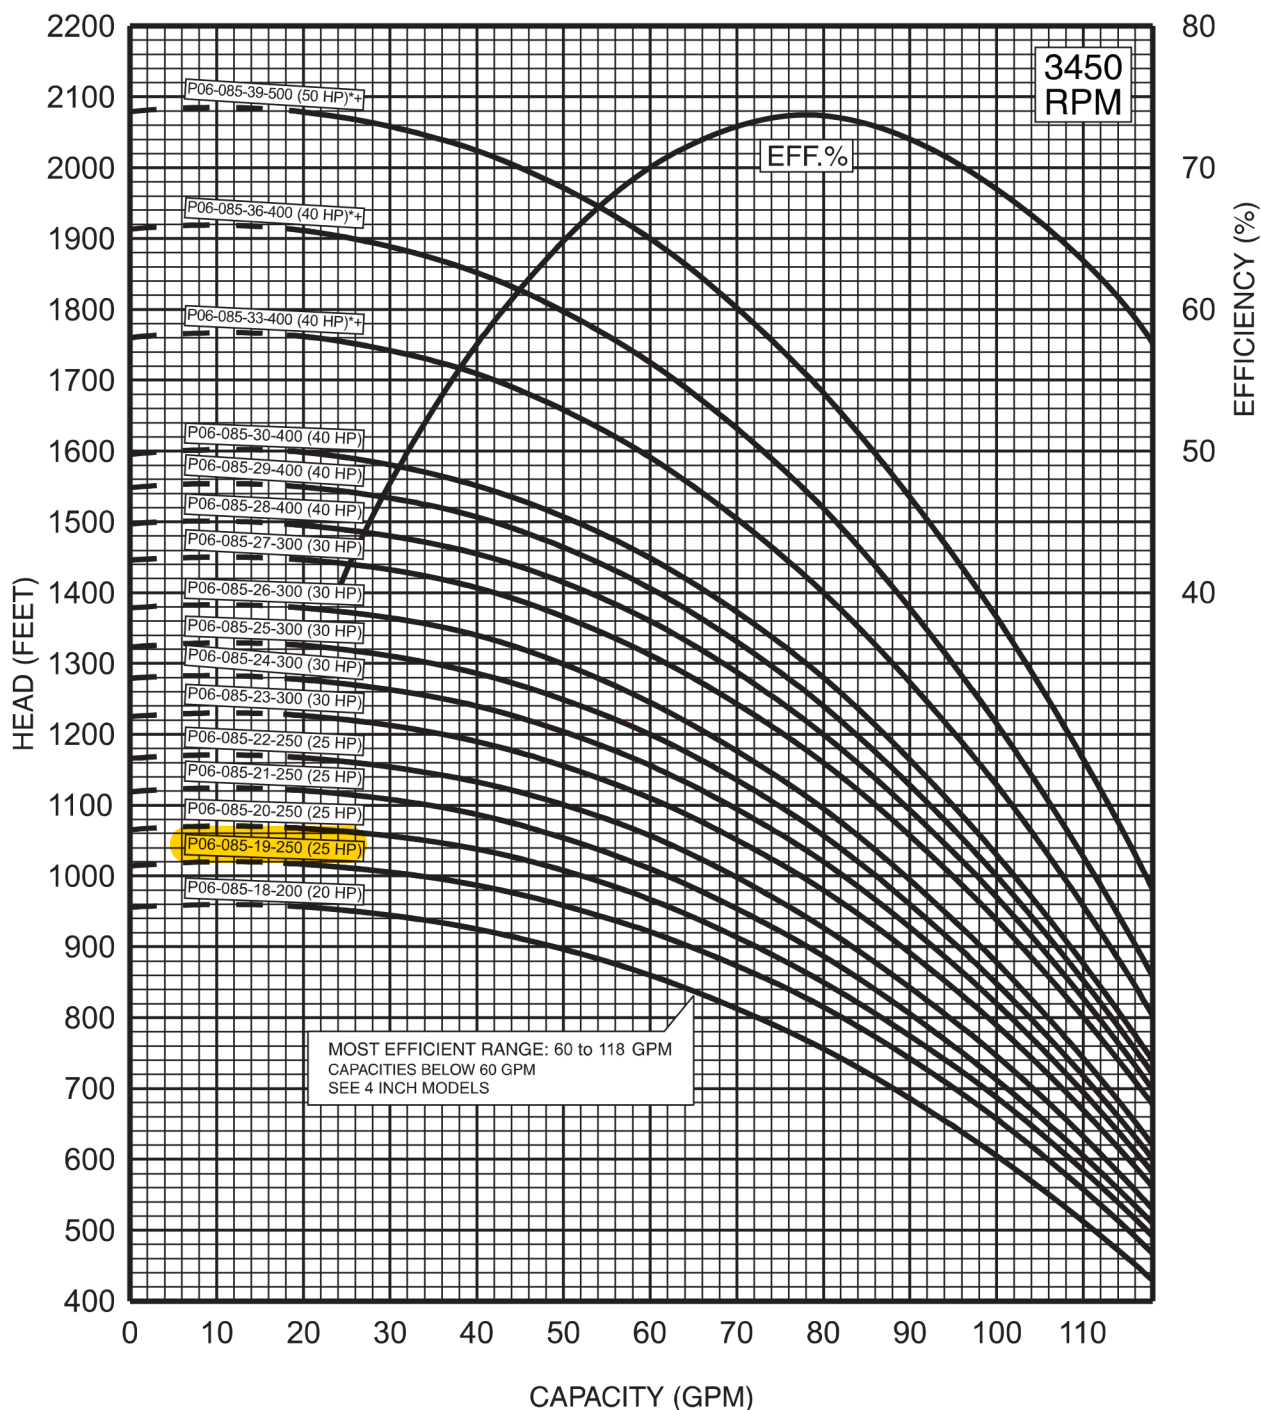

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

* Built into sleeve 3" male NPT discharge/8" min. well diameter.

4" MOTOR STANDARD, UP TO 10 HP/3450 RPM.

6" MOTOR STANDARD, 15-50 HP/3450 RPM.

+ Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
 @ 5 ft. min. submergence.