



EFFECTIVE:
07-APR-11

SUPERSEDES:
20-MAR-03

VERTICAL MOTORS
TEFC - HIGH THRUST
FRAME: 404, 405VP, VPA, VPZ, VPAZ
BASIC TYPE: TV4

PRINT:
09-2412

SHEET:
1 OF 1

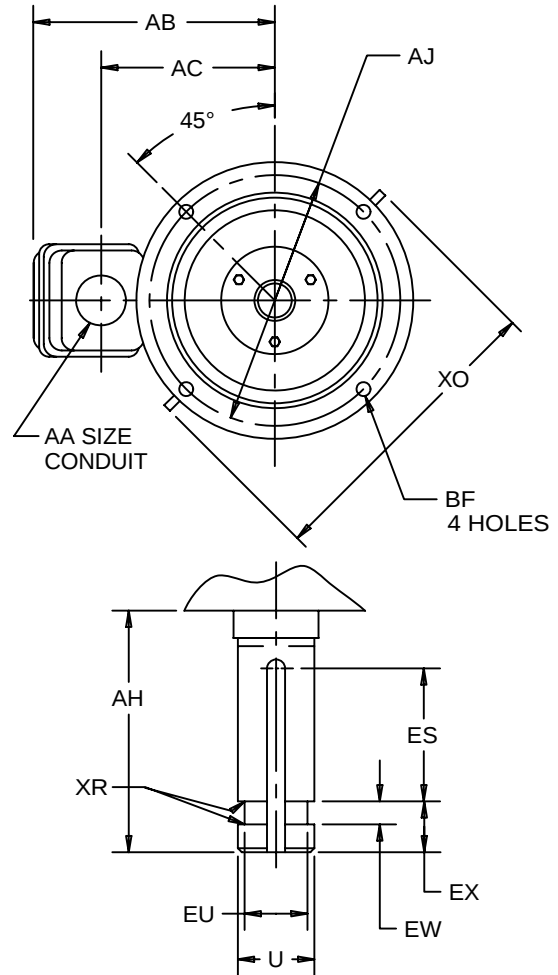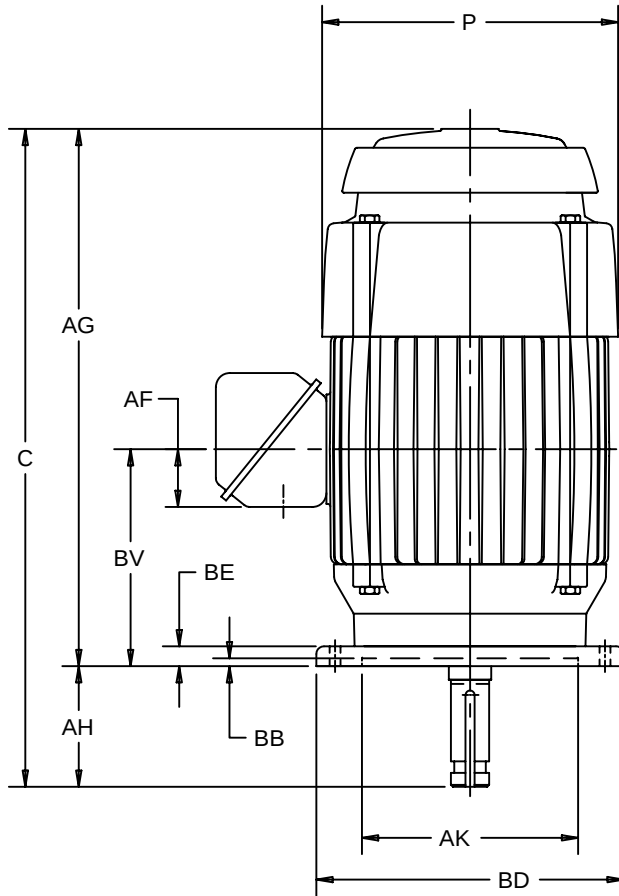

ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS

UNITS	C	P ²	AA	AB	AC	AF	AG	AH ±.062	AJ
IN	50.94	21.19	3.00	17.50	13.31	3.38	46.44	4.500	14.750
MM	1294	538		445	338	86	1180	114.30	374.65

UNITS	AK +.005	BB MIN	BE	BF	BV	ES MIN	EW +.002	EX -.005	XO	XR
IN	13.500	.25	1.00	.69	15.63	3.03	.375	.750	24.13	.03
MM	342.90	6	25	18	397	77	9.53	19.05	613	1

FRAME	UNITS	U -.001	EU -.005	SQ KEY	FRAME	UNITS	BD MAX
404,405VP,VPA	IN	1.625	1.250	.375	404,405VP,VPZ	IN	16.50
	MM	41.28	31.75	9.53		MM	419
404,405VPZ,VPAZ	IN	2.125	1.750	.500	404,405VPA,VPAZ	IN	20.00
	MM	53.98	44.45	12.70		MM	508

1. ALL ROUGH DIMENSIONS MAY VARY BY .25" DUE TO CASTING AND/OR FABRICATION VARIATIONS.
2. LARGEST MOTOR WIDTH.
3. CONDUIT OPENINGS MAY BE LOCATED IN STEPS OF 90 DEGREES REGARDLESS OF LOCATION. STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
4. TOLERANCES SHOWN ARE IN INCHES ONLY.

TOLERANCES	
FACE RUNOUT	.007 T.I.R.
PERMISSIBLE ECCENTRICITY OF MOUNTING RABBIT	.007 T.I.R.
PERMISSIBLE SHAFT RUNOUT	.002 T.I.R.

09-2412/C

Nidec Motor Corporation
St. Louis, Missouri

INFORMATION DISCLOSED ON THIS DOCUMENT
IS CONSIDERED PROPRIETARY AND SHALL NOT BE
REPRODUCED OR DISCLOSED WITHOUT WRITTEN
CONSENT OF NIDEC MOTOR CORPORATION



ISSUED BY
R. KING
APPROVED BY
K. POTTER

IHP_DP_NMCA (MAR-2011) SOLIDEDGE