


CURVA DE RENDIMIENTO

SERIE FWSP 6"

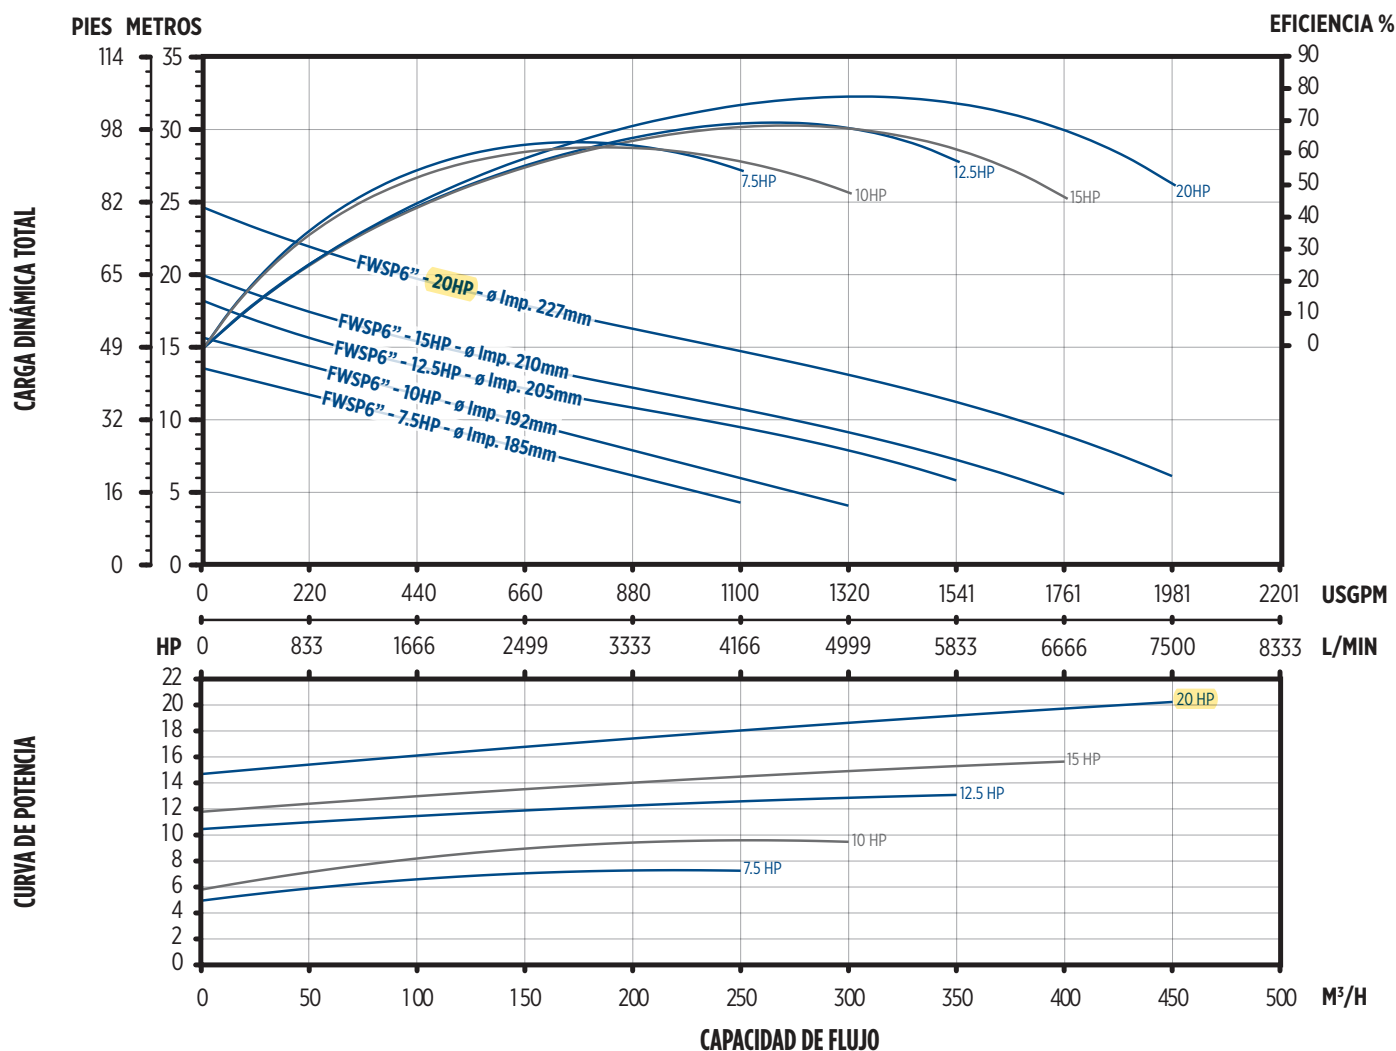

INFORMACIÓN DE SELECCIÓN

HP	DESCARGA	PASO DE SÓLIDOS	FASES	VOLTS	RECORTE DE IMPULSOR (MM)	LPM	881	1761	2642	3522	4403	5283	6164	7045	7925	MODELO	NO. DE PARTE
						GPM	220	440	660	881	1101	1321	1541	1761	1981		
						CARGA EN METROS											
7.5	6"	3"	3	230	-	-	-	-	-	-	-	-	-	-	-	7.5FWSP2303-0603	87100996-01
				380	185	-	13	10	8	6	4	-	-	-	-	7.5FWSP3803-0603	87101016-01
				460	-	-	-	-	-	-	-	-	-	-	-	7.5FWSP4603-0603	87101036-01
230				-	-	-	-	-	-	-	-	-	-	-	10FWSP2303-0603	87100998-01	
380				192	-	14	12	10	8	6	4	-	-	-	10FWSP3803-0603	87101018-01	
460				-	-	-	-	-	-	-	-	-	-	-	10FWSP4603-0603	87101038-01	
230				-	-	-	-	-	-	-	-	-	-	-	12.5FWSP2303-0603	87101000-01	
380				205	-	16	14	12	11	9	8	6	-	-	12.5FWSP3803-0603	87101020-01	
460				-	-	-	-	-	-	-	-	-	-	-	12.5FWSP4603-0603	87101040-01	
230				-	-	-	-	-	-	-	-	-	-	-	15FWSP2303-0603	87101002-01	
380				210	-	17	15	14	12	11	9	7	5	-	15FWSP3803-0603	87101022-01	
460				-	-	-	-	-	-	-	-	-	-	-	15FWSP4603-0603	87101042-01	
230				-	-	-	-	-	-	-	-	-	-	-	20FWSP2303-0603	87101004-01	
380				227	-	22	20	18	16	14	13	11	9	6	20FWSP3803-0603	87101024-01	
460				-	-	-	-	-	-	-	-	-	-	-	20FWSP4603-0603	87101044-01	